



13-4 Heat FR-AF

Optimized for high Arc Flash risks

Perfect in tough working conditions with high spark, heat and flame risks

High performance in cut resistance

Main materials: Para aramid, Fibreglass, Chloroprene composite



Teknik Bilgiler

Categories: Cut, Arc Flash

SKU: 13-4HFR-AF

Standard:EN388, EN388 CUT, ANSI CUT, ASTM F2675, BOX TEST (modified), EN407

Cut resistant:A5, E


Attributes:Arc Flash protection, Contact heat resistant, Flame resistance, Oily environment,

Palm coated

Coating:FR

Available Sizes 7-12

EN388

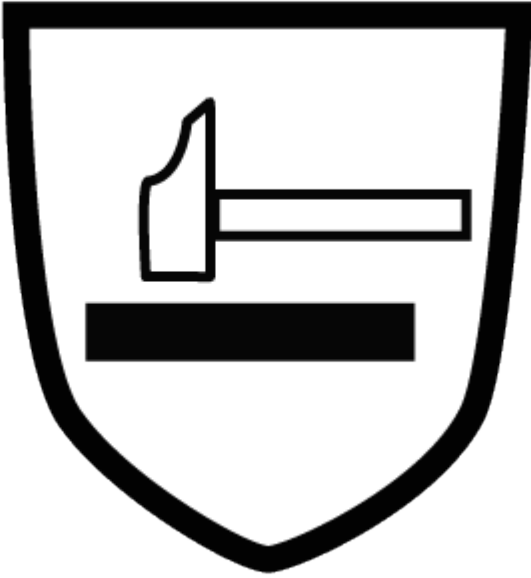


3X43E

ANSI CUT



A5

ASTM F2675

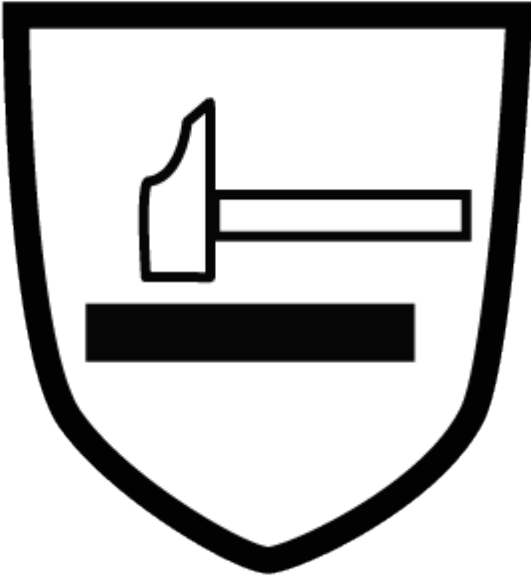

16-40

BOX TEST (modified)



Class 2

EN407



41324X

CE
CAT II



SINCE
1979



9001:2015
CERTIFIED
COMPANY



Delivering Worldwide
70+ Countries and
Growing!