



**FREEZE PROOF CABLE HEATED AND INSULATED
EMERGENCY SHOWER AND EYEWASH
ISTEC Type ES-ICH & ESW-ICH**

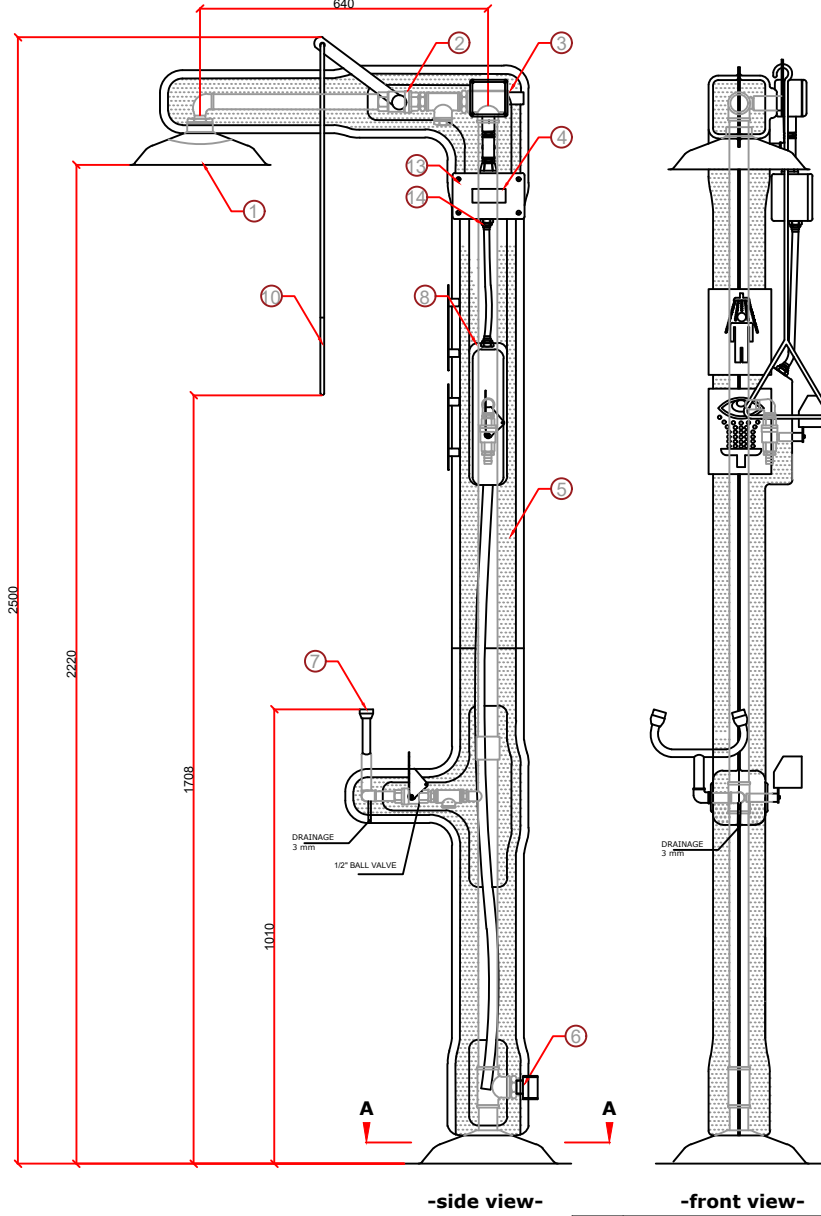

Standarts: EN 15154-1, EN 15154-2
Water Flow: 11,5 lt/ min for Eyewash
75 lt / min for Shower
Total Weight: 20,5 kgs
Packed Dimensions: 86 x 35 x 25 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar
Total Power: 105W



section A-A

NO.	DESCRIPTION	MATERIAL
14	Rakor(IP67)	Brass
13	Thermostat Box(IP66)	PVC
12	Push Handle Control for Eyewash	Stainless Steel
11	1 1/4" Pipe	Stainless Steel
10	Pull Rod Control for Shower	Stainless Steel
9	Emergency Sign	PVC (Luminous)
8	Electrical Heating Tape	Ex-proof (Zone I)15 W / m
7	Spray Nozzles	Brass
6	1 1/2" Water Inlet (FNPT)	Stainless Steel
5	Insulation	Polietilen
4	Digital Thermostat(IP65-IP20)	Non-exproof
3	Junction Box(IP67)	Non-exproof
2	1" Ball Valve	Stainless Steel
1	Shower head Bowl (Ø300mm)	Stainless Steel



REV. DATE

DATE

FIRST ISSUE

SS

FA

ST

DESCRIPTION

DESIGNED

CHECKED

APPROVED

ORIGINAL

EDITION

SS

FA

ST

SIZE

SCALE

A4

1/100

CUSTOMER

PRODUCT

15036100

DRAWING NUMBER/DATE:

44/16-1

SHEET:

1

OF:

1

DRAWING NAME:

ISTEC Type ES-ICH & ESW-ICH

IST İsci Sağlığı Teçizatı Sanayi ve Ticaret Ltd Sti
Ostim Melih Gökçek Blv 31 Cadde 2269 sokak 42
Ankara Türkiye 06374 www.ist.com.tr
Ph 0090312 384 13 00 Fax 0090312 341 73 03