


EYEWASH SHOWER **15012000**

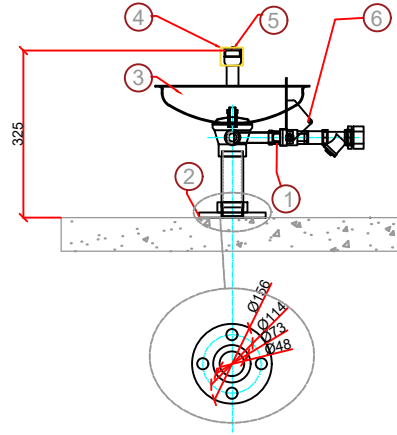

Standarts: EN 15154-2
Water Flow: 11,5 lt/ min for Eyewash
Total Weight:5.10 kgs
Packed Dimensions: 32 x32 x 22 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar

| NO. | DESCRIPTION | NOTES | |-----|---------------------------------|-------| | 6 | Push Handle Control for Eyewash | | | 5 | Spray Nozzles | | | 4 | Dust Cover on Eyewash Spray | | | 3 | Eyewash Bowl | | | 2 | Water Inlet With Flange | | | 1 | 1/2" Ball Valve | |

6	Push Handle Control for Eyewash	
5	Spray Nozzles	
4	Dust Cover on Eyewash Spray	
3	Eyewash Bowl	
2	Water Inlet With Flange	
1	1/2" Ball Valve	

REV. DATE FOR RFO/DESIGN IS		DESCRIPTION DESIGNED CHECKED APPROVED		SIZE SCALE		CUSTOMER PRODUCT	
STATUS FOR INFORMATION FOR REVIEW FOR APPROVAL		ORIGINAL EDITION		SS FA ST		15012000	
IST İsci Sagligi TeHzizatı Sanayi ve Ticaret Ltd Sti Ostim Melih Gokcek Blv 31 Cadde 2269 sokak 42 Ankara Türkiye 06374 www.ist.com.tr Ph 0090312 384 13 00 Fax 0090312 341 73 03		DRAWING NUMBER/DATE: 412/16-2		SHEET: 1		DRAWING NAME: EYEWASH SHOWER	