


ISTEC® TYPE ESW PLATFORM ACTIVATED COMBINED SHOWERS

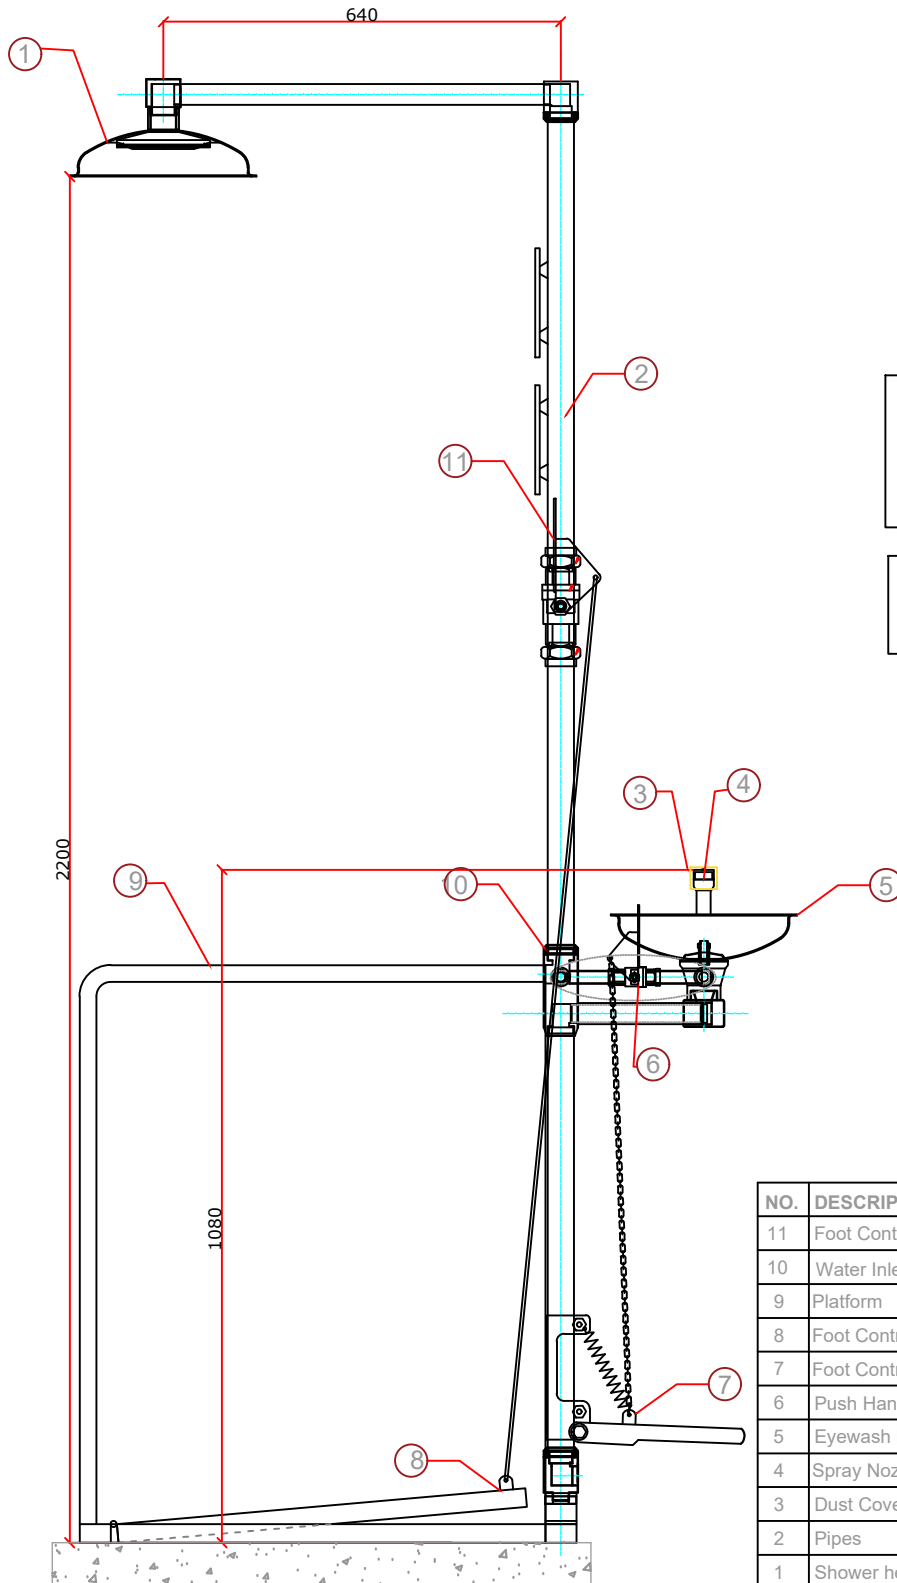

Standarts: EN 15154-1, EN 15154-2
Water Flow: 11,5 lt/ min for Eyewash
75 lt / min for Shower
Total Weight:40,5 kgs
Packed Dimensions: 95 x 85 x 25 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar

NO.	DESCRIPTION	MATERIAL
11	Foot Control	
10	Water Inlet 1" (Female)	
9	Platform	
8	Foot Control for Shower	
7	Foot Control for Shower	
6	Push Handle Control	
5	Eyewash Bowl	
4	Spray Nozzles	
3	Dust Cover on Eyewash Spray	
2	Pipes	
1	Shower head Bowl (Ø300mm)	

IST

REV.	DATE	DESCRIPTION	DESIGNED	CHECKED	APPROVED
A		FIRST ISSUE	SS	FA	ST

STATUS	FOR INFORMATION	☐	FOR RFQ/DESIGN	☒
	FOR REVIEW	☐		
	FOR APPROVAL	☐		



DESIGNED	CHECKED	APPROVED	ORIGINAL	EDITION	SIZE	SCALE
✓	✓	✓	SS	FA	A4	1/100
✓	✓	✓	ST	ST		

IST İsci Sağlığı Teçizatı Sanayi ve Ticaret Ltd St
Ostim Melih Gökçek Blv 31 Cadde 2269 sokak 42
Ankara Türkiye 06374 www.ist.com.tr
Ph 0090312 384 13 00 Fax 0090312 341 73 03

CUSTOMER	
PRODUCT	15035000

DRAWING NUMBER/DATE:	SHEET:	DRAWING NAME:
527/16-1	1	EMERGENCY SHOWER
	OF:	
	1	