


ISTEC TYPE ESW, FROST PROTECTED, UNDERGROUND SYSTEM,
GALVANIZED STEEL EMERGENCY COMBINED SHOWER UNIT
P/N: 15039500

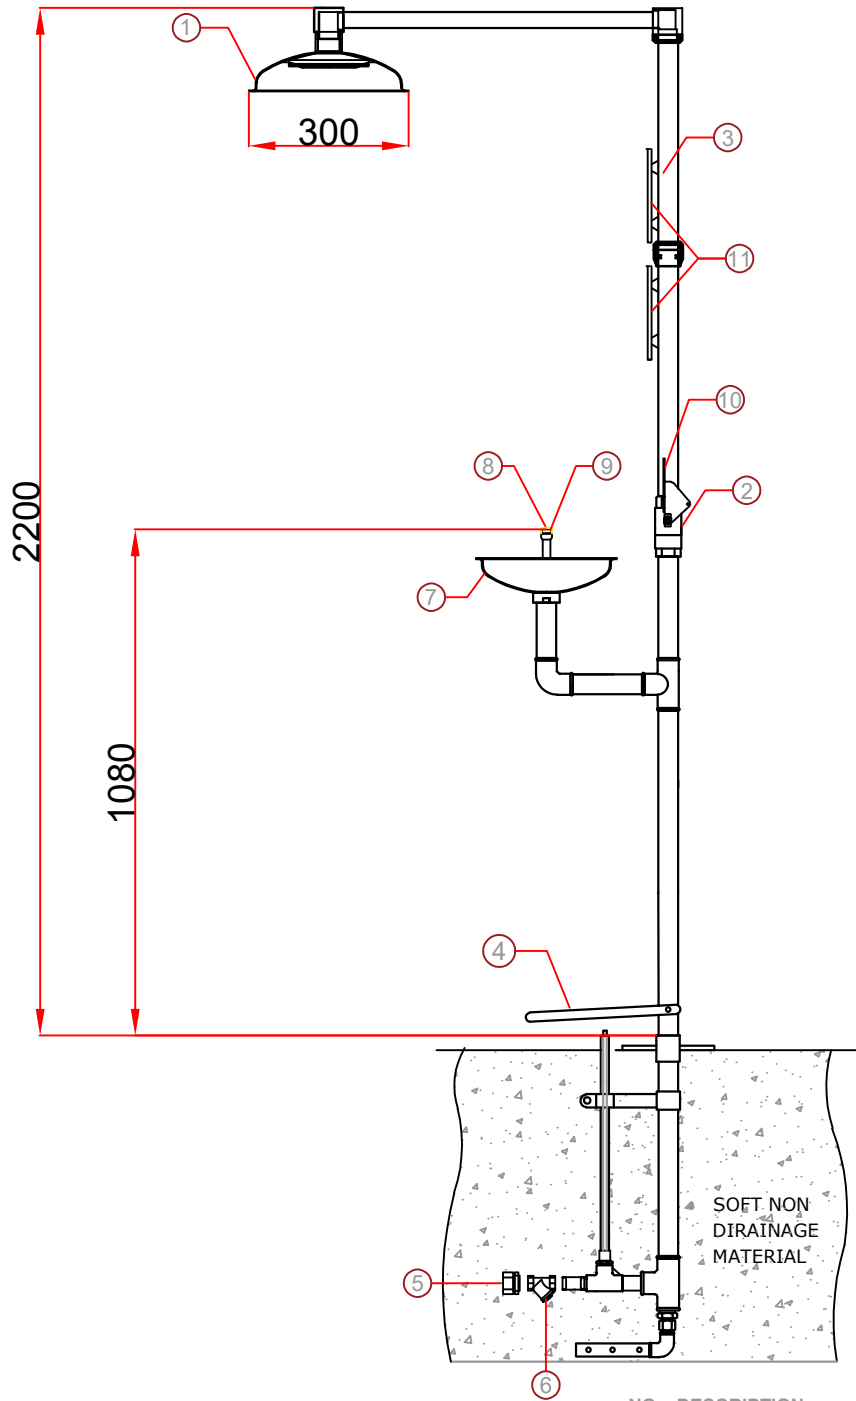

Standarts: EN 15154-1
Water Flow: 75 lt / min for Shower
Total Weight: 34 kgs
Packed Dimensions: 71x101x27 cm

Static test pressure : 7 bar
Min using pressure : 1,4 bar
Max using pressure : 2,8 bar

NO.	DESCRIPTION	MATERIAL
11	Emergency Sign	Phosphorus
10	Push Handle Control	Galvanized Painted Steel
9	Spray Nozzles	Brass
8	Dust Cover on Eyewash Spray	Plastic
7	Eyewash Bowl (Ø250mm)	ABS
6	Filter	Brass
5	1" Water Inlet	Galvanized Painted Steel
4	Foot Pedal Control	Galvanized Painted Steel
3	Pipes	Galvanized Painted Steel
2	1" Ball Valve	Brass
1	Shower head Bowl (Ø250mm)	ABS



REV.	DATE	DESCRIPTION	DESIGNED	CHECKED	APPROVED
A		FIRST ISSUE	SS	FA	ST



FOR INFORMATION	☐	FOR RFQ/DESIGN	☒
FOR REVIEW	☐		
FOR APPROVAL	☐		

IST İsci Sağlığı Teçizatı Sanayi ve Ticaret Ltd Sti
İvedik OSB Mh. 2269. Cd. No:42 Yenimahalle 06374,
Ankara, Türkiye
www.ist.com.tr
Ph 0090312 384 13 00 Fax 0090312 341 73 03

PRODUCT	ISTEC TYPE ESW, FROST PROTECTED, UNDERGROUND SYSTEM, GALVANIZED STEEL EMERGENCY COMBINED SHOWER UNIT
---------	---

DRAWING NUMBER/DATE:	110/17	SHEET:	1	DRAWING NAME:	15039500
		OF:	1		