ELECTPRO®

ULTRASOFT 900

Electric Arc Flash Protective Garment

P/N: 13513122

SUPERIOR PROTECTION



CE

EN 61482-2:2020
APC 2 (7kA)
ATPV: 63cal/cm²

PPE
Personal Protective Equipment
Category III
REGULATION (EU)2016/425

EN 1149-5:2018

EN ISO 13688:2013+
EN ISO 13688/A1:2021

GS ET 29:2019

Westex UltraSoft®

Westex Indigo®

Outer Fabric: Made from flame-retardant, high-quality cotton and polyamide fibers.
Inner Lining: Flame-resistant cotton for enhanced safety and comfort.

The ELECTPRO® G2L ULTRASOFT 900 is a specially designed operator suit that provides superior protection against high-energy arc flash incidents, heat, pressure, and molten particles. This three-piece set, consisting of a jacket, trousers, and protective hood, offers comprehensive coverage. Classified as Personal Protective Equipment under (EU) 2016/425, this suit complies with IEC EN 61482-2 and GS ET 29 European standards and is CE certified.

Key Design Features

Complete Set: Includes a long jacket, bib trousers, and protective hood, providing full coverage.
Adjustable Waist and Cuffs: Easy-to-adjust hook-and-loop straps for a customized fit.
Pocket-Free Design: No pockets to minimize the risk of arc flash incidents, enhancing user safety.
Protective Falp: Full-length protective flap on the front of the jacket for added safety.
Ergonomic Bib Design: Offers greater freedom of movement, ensuring comfort during use.

ELECTPRO® ULTRASOFT 900
Electric Arc Flash Protective Garment
Westex Indigo®
Westex UltraSoft®



ATPV 63 cal/cm²
HRC 4


Superior Protection for Arc Flash and High-Energy Environments (ATPV 63 cal/cm²)

Applications

- Medium and High Voltage Transformer Stations
- Switchgear Facilities
- High Voltage Oil Circuit Breaker Areas
- Electric Power Generation and Distribution Plants



Westex®, UltraSoft®, Westex Indigo™ are registered trademarks of Milliken & Company.

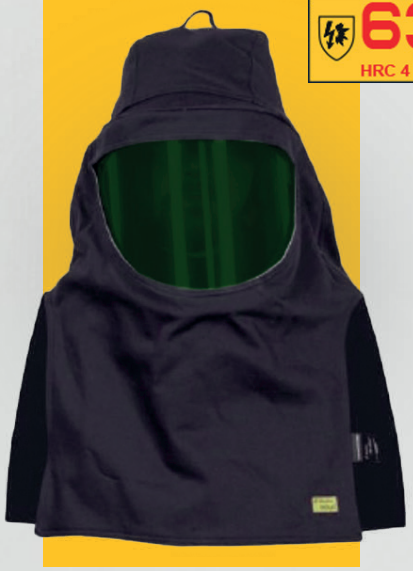

Protective Hood

Hood Visor Premium anti-fog coated, dual-pane visor produced through injection molding with optical corrections. ATPV 75 cal/cm².

- **Material:** Polycarbonate
- **Window Size:** 25.4 x 50.8 x 0.15 cm (10“ x 20“ x 0.06“)
- **Weight:** 334 g (11.78 oz)
- **Color:** Grey
- **Standards:** NFPA 70E, ANSI Z87.1, ASTM F2178, 75 cal/cm²



The visor used in the hood is 75 cal/cm²

Certified Safety

CE

EN 61482-2:2020
APC 2 (7kA)
ATPV: 63cal/cm²

EN 1149-5:2018

EN ISO 13688:2013+
EN ISO 13688/A1:2021

GS ET 29:2019

PPE
Personal Protective Equipment
Category III
REGULATION (EU)2016/425



Scan the QR code with your phone's camera to view the product on our website and get a quote.

ELECTPRO® ULTRASOFT 900 SIZE CHART

ELECTPRO® ULTRASOFT 900 Electric Arc Flash Protective Garment

SIZE	PERSON LENGHT	PERSON CHEST SIZE	PERSON WAIST SIZE	JACKET LENGHT SIZE
	(CM)	(CM)	(CM)	(CM)
S 46/48	164-170	88-96	76-84	93
M 50/52	170-176	96-104	84-92	93
L 54/56	176-182	104-112	92-100	95
XL 58/60	182-188	112-120	100-108	95
XXL 62/64	188-192	120-128	108-116	97
TOLERANCE ± % 2				